LED-2170

Product Description: Diffuse PC lens to provide efficient distribution of light. Easy access to photocell switch. Wattage COLOR Easy access to the control switch for a TUNABLE range of CCTs and wattages to choose from Selectable

Product Description:

This compact but powerful flood light is a true innovation practically and aesthetically. The upgraded tuning switch allows for easy access to a range of CCTs and wattages based on different environments. Utilizing performance optics andlong lasting driver, these landscape flood lights will last for years to come.

Features:

LISTING

- ▶UL and CUL listed for wet locations HOUSING
- ▶ Solid construction die-cast aluminum body
- ▶UV stabilized powder coated finish

OPTIONS

- ▶ Optional photoceII
- ▶ Finish Bronze. Color options with adder Build in color adjustable control ranging from 3000K to 5000K

Performance Data

Model NO.	Nominal Watts**	Lumens**	Efficacy**				
LED-2170		4000 l m*	133 lm/W*				
	30/20/10W	2700 lm*	135 lm/W*				
		1400 l m*	140 lm/W*				

Lumen and Efficacy shows the highest wattage at 4000K


Specification:

Example: LED-2170 Tunable

Model No.	Nominal Watts**	Input Voltage	CRI	Color* Temp	Option	Finish	Starting Temp
LED-2170	030 =30W	UNV =120-277V	8 =80+	TX = 5000K 4000K 3000K	PC = Photocontrol D = Dimmable FAO = Watage and CCT Smart Controller	BZ= Bronze	-40°C ~ +40°C

^{*} Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

Dimension:

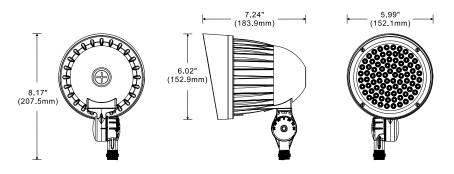

















^{**} DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.