



Available Options



Slip Fitter

Product Description:

One piece die cast aluminum heatsink provides the most ideal heat dissipation, making the fixture cool to the touch

High performance optics provide maximum lighting solution to your needs



Optional 120V-277V button photocell available

Standard 4 KV surge protection included



IP 65 for both Optical and Electrical chamber

Product Description:

This compact but powerful flood light is a true innovation practically and aesthetically. With highly efficient LED engine and precise optical control, greater lighting performance adds the value to its exterior appearance. These LED lights have transformed the landscape lighting environment. Utilizing performance optics and long lasting driver, these landscape lights will last for years to come.

Features:

LISTING

►UL and CUL listed for wet locations

HOUSING

►Solid construction die-cast aluminum body

FINISH

►UV stabilized powder coated finish

OPTIONS

►Finish - Bronze. Color options with adder

Optional Kelvin color\* with adder.

Performance Data


Model NO.	System Watts	Beam Angle	Lumens	Lpw	B	U	G
LED-23150	147 W	80° x 120°	18294 lm**	125 lm/W	4	2	1
LED-23200	187 W	80° x 120°	23465 lm**	125 lm/W	4	2	1

Specification:

Example: LED-23150 147UNV740-SF

Model No.	System Watts	Input Voltage	CRI	Color Temp	Option		Finish	Starting Temp
					Accessories	Mounting		
LED-23150	147=147W	UNV=120-277V	7=70+	30=3000 K	XS=10kv Surge PE=Photocontrol	SF=Slip Fitter U=U Bracket	BZ=Bronze	-40°C
LED-23200	187=187W			40=4000 K				
				50=5000 K				

Dimension:

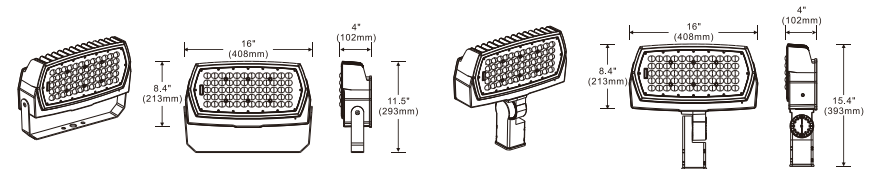

LED-23150/23200-U

LED-23150/23200-SF