



Available Options



Slip fitter

Product Description:

One piece die cast aluminum heatsink provides the most ideal heat dissipation, making the fixture cool to the touch

High performance optics provide maximum lighting solution to your needs



Standard 6 KV surge protection included

Optional 120V-277V button photocell available



IP 65 for both Optical and Electrical chamber

Product Description:

This compact but powerful flood light is a true innovation practically and aesthetically. With highly efficient LED engine and precise optical control, greater lighting performance adds the value to its exterior appearance. These LED lights have transformed the landscape lighting environment. Utilizing performance optics and long lasting driver, these landscape lights will last for years to come.

Features:

LISTING

►UL and CUL listed for wet locations

HOUSING

►Solid construction die-cast aluminum body

FINISH

►UV stabilized powder coated finish

OPTIONS

►Finish - Bronze. Color options with adder

Optional Kelvin color* with adder.

Performance Data


Model NO.	System Watts	Beam Angle	Lumens	Lpw	B	U	G
LED-2330	28 W	80 × 120°	3307 lm**	118 lm/W	2	1	0
LED-2350	48 W	80 × 120°	5563 lm**	122 lm/W	2	1	0

Specification:

Example: LED-2330028UNV740-SF

Model No.	System Watts	Input Voltage	CRI	Color Temp	Option		Finish	Starting Temp
					Accessories	Mounting		
LED-2330	028=28W	UNV=120-277V	7=70+	30=3000 K 40=4000 K 50=5000 K	PE=Photocontrol	SF=Slip Fitter U=U Bracket	BZ=Bronze	-40°C
LED-2350	048=48W							

Dimension:

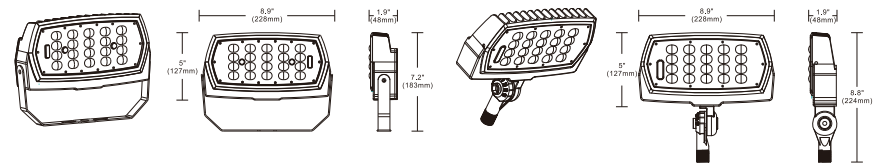

LED-2330/2350-U

LED-2330/2350-SF