


Product Description:

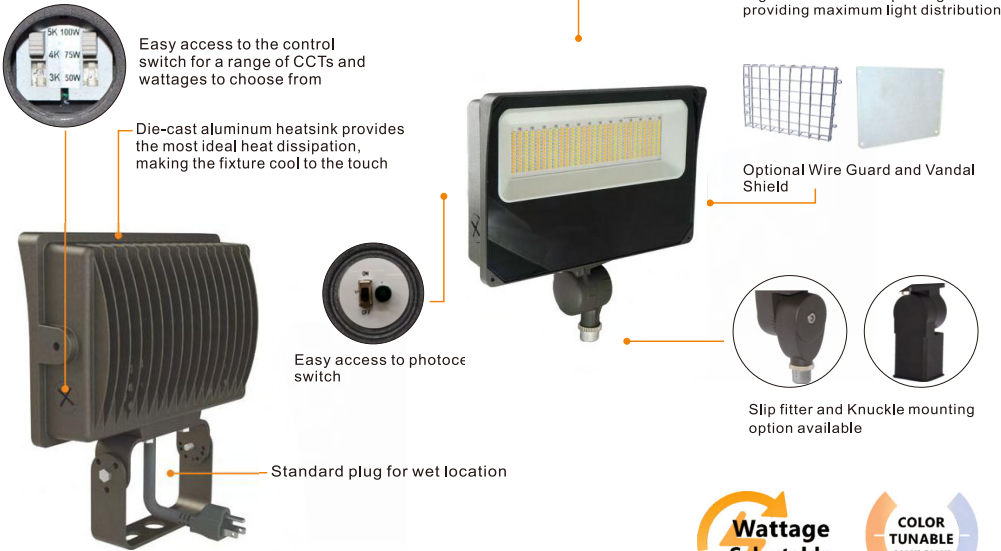

Performance Data

| Model NO. | System Watts | Lumens** | Efficacy** |
|-----------|--------------|------------|------------|
| LED-29030 | 10/20/30W | 4069 lm** | 138 lm/W** |
| LED-29060 | 30/45/60W | 8089 lm** | 138 lm/W** |
| LED-29090 | 50/70/90W | 12060 lm** | 138 lm/W** |
| LED-29150 | 90/120/150W | 20421 lm** | 136 lm/W** |

Lumen and Efficacy are based on the highest wattage at 5000K

Specification:

Example: LED-29XXX Series

| Model No. | System Watts | Input Voltage | CRI | Color Temp* | Mounting | Finish | Option |
|-----------|--------------|-----------------|-------|-------------|----------------|-----------|-------------------|
| LED-29030 | 30W | UNV= 120-277VAC | 8=80+ | 30=3000 K | SF=Slip Fitter | WH=White | BLANK = No Sensor |
| LED-29060 | 60W | | | 40= 4000 K | SFS=Knuckle | BK=Bronze | PC = Photocell |
| LED-29090 | 90W | | | 50=5000 K | TR=Trunnion | | |
| LED-29150 | 150W | | | | | | |

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Product Description:

This compact but powerful flood light is a true innovation practically and aesthetically. The upgraded color tuning switch allows easy access to a range of CCTs based on different environments. Utilizing performance optics and long lasting driver, these landscape flood lights will last for years to come.

Features:

- LISTING**
 - ▶ UL and CUL listed for wet locations
- HOUSING**
 - ▶ Solid construction die-cast aluminum body
- FINISH**
 - ▶ UV stabilized powder coated finish
- OPTIONS**
 - ▶ Optional photocell
 - ▶ Finish - Bronze. Color options with adder
 - Build in color adjustable control ranging from 3000K to 5000K