





Line Drawing



Dimensions

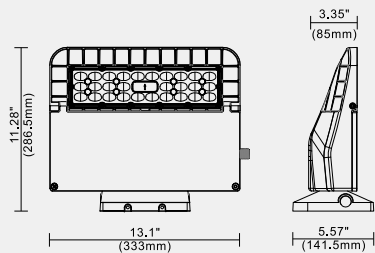

Product Description:

This sleek and modern luminaire has been designed to handle any environment. With an appealing slimline design along with one of the highest lumen performance on the market, this versatile fixture can be used as a flood light or an area light. Including a multitude of mounting options, surge protection devices, IOT photocell capability, and the most technologically advanced LED's on the market, the LED-3016 is ready to conquer the lighting landscape.

Optional mounting and Kelvin color\* with adder.

Features:

**LISTING**

► UL and cUL listed for wet locations, DLC Premium

**HOUSING**

► One piece die-cast aluminum body with die-cast hinged driver access for easy installation

**LEDS**

► The most technologically advanced LED chips in the market

**FINISH**

► UV stabilized powder coated finish

**LENS**

► Optional Type III, Type IV, Type V optics

**OPTIONS**

► Finish - Bronze. Color option with adder

► Standard 4kV surge

Product Description:




**Integrated Heatsink**  
Integrated cooling fin provides excellent thermal dissipation. This design allows the fixture to have extremely long lifetime hours.

**Proprietary Optical Control**

Specifically designed lens Type III, IV, and V allow architects maximum freedom to design any layout without restraint. These optics are engineered for maximum light output.




Optional Photocell



**Redesigned Door Frame**

The driver compartment access door has been reversed to open away from the mounting surface. This allows even more space for installers to work with.



Quick mount bracket for easy install and wiring.

Performance Data

Model NO.	System Watts	Lumens	Lpw
LED-3016-L70	46W	6095	132.5
LED-3016-L112	80W	11024	137.8

Specification:

Example: LED-3016

Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Distribution	Option		Finish	Starting Temp
						Accessories	Mounting		
LED-3016	46=46W 80=80W	UNV=120-277V	7=70+	30=3000 K 40=4000 K 50=5000 K	T3=Type III T4=Type IV T5=Type V	PE=Photocontrol	W=Wall Mount	BZ=Bronze	-40°C