





Available Options



Line Drawing



Dimensions

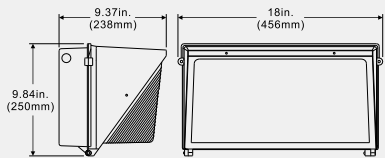

Product Description:


Utilizing the latest generation of LED Chips and patented smart controller, this uniquely designed wall pack not only delivers a similar light output of a 250W metal halide, but it also has multiple wattage and CCT to choose from based on different environment. Housing made out of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment. It is attractive in appearance and performance.

Optional mounting and Kelvin color\* with adder.

Features:

- LISTING**  
UL and CUL listed for wet locations
- HOUSING**  
Die-cast aluminum body
- FINISH**  
UV stabilized powder coated finish
- LENS**  
Heat and impact resistant borosilicate glass
- OPTIONS**  
Dimmable option with adder  
Finish - Bronze. Color option with adder  
Optional wire guard / visor with adder

Product Description:

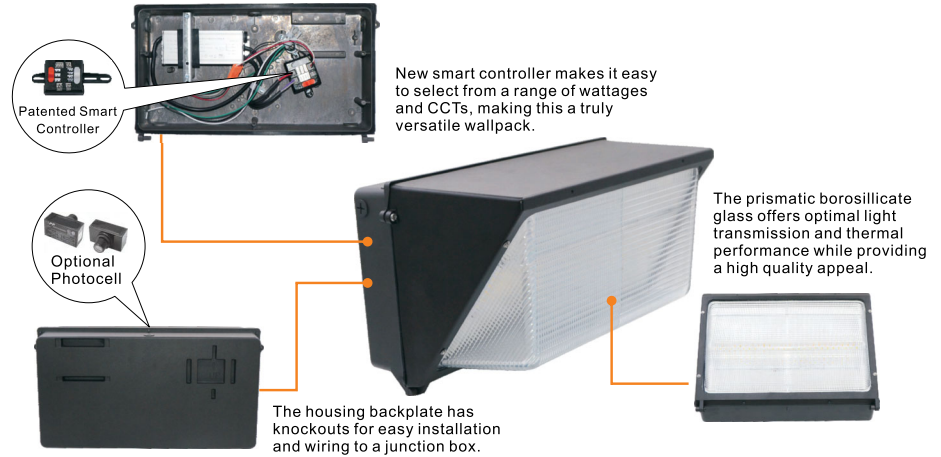

Performance Data

Model NO.	System Watts	Lumens	Lpw
SML-707-CS-105 Standard	65/80/90/105W	12796 lm**	116 lm/w
SML-707-CW-85 Premium	49/60/74/85W	11800 lm**	144 lm/w

\*\* Lumen shows the highest wattage

Specification:

Example: SML-707-CW

Model No.	System Watts	Input Voltage	CRI	Color Temp	Option	Feature	Finish	Starting Temp
SML-707-CS-105	0105=105W	UNV=120-277V	7=70+	TX=5000 K	XS= 10kV Surge	W=Wall Mount	Bronze	-40°C
SML-707-CW-85	081.7=81.7W			TX=4000 K	2S= 20kV Surge			
				TX=3000 K	PC = Photocontrol			