




Available Options




Wire Guard Visor

Line Drawing



Dimensions

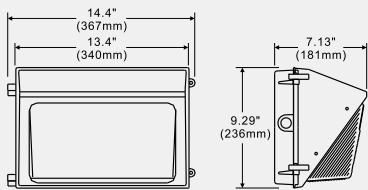

Product Description:

Utilizing the latest generation of LED chips, this uniquely designed wall pack delivers a similar light output to a 150 /200 W metal halide but with only 1/3 energy consumption. It is attractive in appearance and performance.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed

HOUSING

Die-cast aluminum body

LEDS

New generation COB technology

FINISH

UV stabilized powder coated finish

LENS

Heat and impact resistant borosilicate glass

OPTIONS

Optional 347V with adder

Finish - Bronze. Color option with adder

Optional wire guard / visor with adder

Specification

Model No.	SML-106-L1	SML-106-L2	SML-106-L2
System watts	40	53	75
Lumen Output	4303 lm**	5594 lm**	9471 lm**
Color	5000K		
MA	950 MA	700 MA	950 MA
Input Voltage	120~277V		
CRI	70+		
Starting Temp	-40°C		
Equivalent	100W MH	100W-150W MH	250W MH



Available Options




Optional photo control

Line Drawing



Dimensions



Product Description:

Utilizing the latest generation of LED chips, this uniquely designed wallpack delivers a similar light output to a 70W metal halide but with only 1/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment, It is attractive in appearance and performance.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

Prismatic lens for uniform light distribution

OPTIONS

Photo control included

Finish - Bronze / White

Specification

Model No.	SML-352	
System watts	15	19
Lumen Output	1769 lm**	2131 lm**
Color	5000K	
MA	300 MA	480 MA
Input Voltage	120~277V	
CRI	70+	
Starting Temp	-40°C	
Equivalent	50W-70W MH	70W-100W MH