

Product Description:

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.

Features:

LISTING

▶UL and CUL listed

HOUSING

▶Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

▶Suitable for use in -40°C to +40°C

EFFICACY

▶Up to 130 lumens per watt (see individual wattage data)

CCT AND CRI

▶3000K, 4000K and 5000K CCT available, 80CRI

LENS

▶Precision and high reflectance lens producing superior uniformity

ELECTRICAL

▶Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard);50/60Hz;

▶2KV-4KV Surge.

▶Dimming 0-10V driver Standard.

▶Occupancy sensor (PIR) optional.

FINISHES

▶Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.

Performance Data

Model NO.	System Watts	Lumens	Efficacy	Linkable
LED-ST-8F-65S	68W	8755 lm	129 lm/W	8ft connect up
LED-ST-8F-65P	33/50/69W	8624 lm	126 lm/W	8ft connect up
*Lumen and efficacy are based on highest wattage 5000K				

Specification:

Example:LED-ST-8F

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
LED-ST-8F-65S	68W	UNV= 120-277VAC	8=80+	30=3000 K	WH=White	BLANK = No Sensor OS =Occupancy Sensor EM = Emergency Driver
LED-ST-8F-65P	33W 50W 69W			40= 4000 K 50=5000 K		






Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:

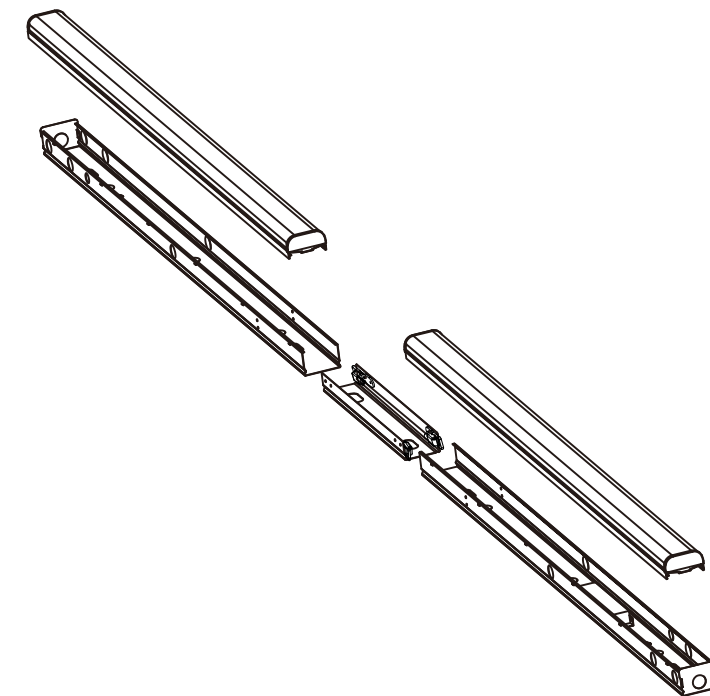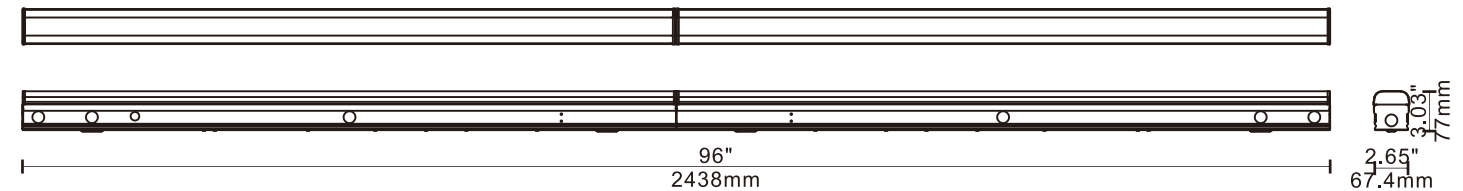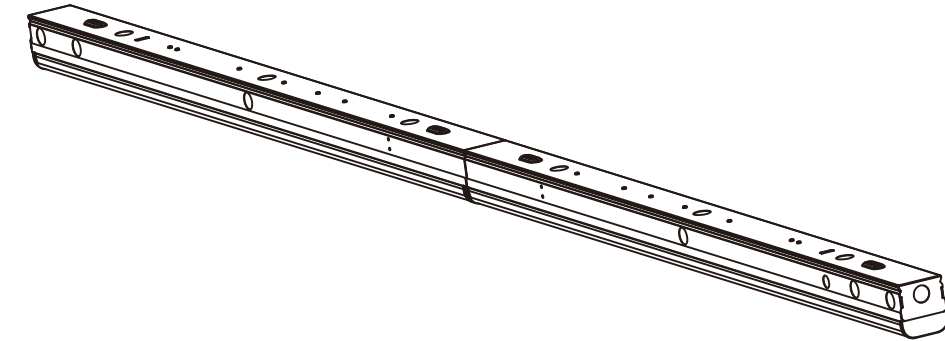

505 S. Yorbita Road, City of Industry, CA 91744, USA

Tel:(626)839-8868 Fax:(626)581-8099

e-mail: sales@grandlite.com

www.grandliteled.com



Scan QR CODE
for more information