

Performance Data

Model NO.	System Watts	Lumens*	Efficacy*	Linkable
LED-ST2-20S	20W	2668 lm*	133 lm/W*	2ft
LED-ST4-45S	43W	5565 lm*	128 lm/W*	4ft connect up to 8ft

*Lumen and efficacy are based on 5000K

Specification:


Example: LED-ST-S

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
LED-ST2-20S	20W	UNV= 120-277VAC	8=80+	40= 4000 K	WH=White	BLANK = No Sensor
LED-ST4-45S	43W			50=5000 K		OS = External Occupancy Sensor



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:



LED-ST2-20S

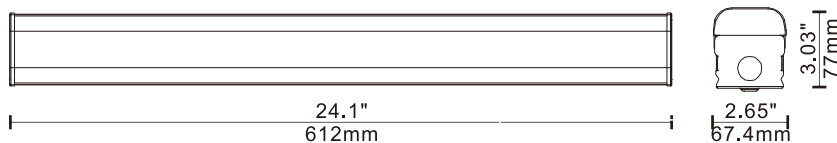

Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.