

## Performance Data

Model NO.	System Watts	Lumens*	Efficacy*
LED-TR4-60P	25/39/55W	7170 lm*	129 lm/W*
*Lumen and efficacy are based on highest wattage 5000K			

## Specification:




Example: LED-TR4-P

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
LED-TR4-60P	25W 39W 55W	UNV= 120-277VAC	8=80+	30=3000 K 40= 4000 K 50=5000 K	WH=White	FAO = Tunable Smart Controller  BLANK = No Sensor  OS = External/Internal Occupancy Sensor  EM = Emergency Driver

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

## Dimension:

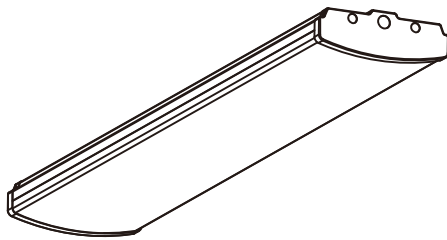

Scan QR CODE  
for more information



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.