


SOLAR STREET LIGHT



PRODUCT SHOW:

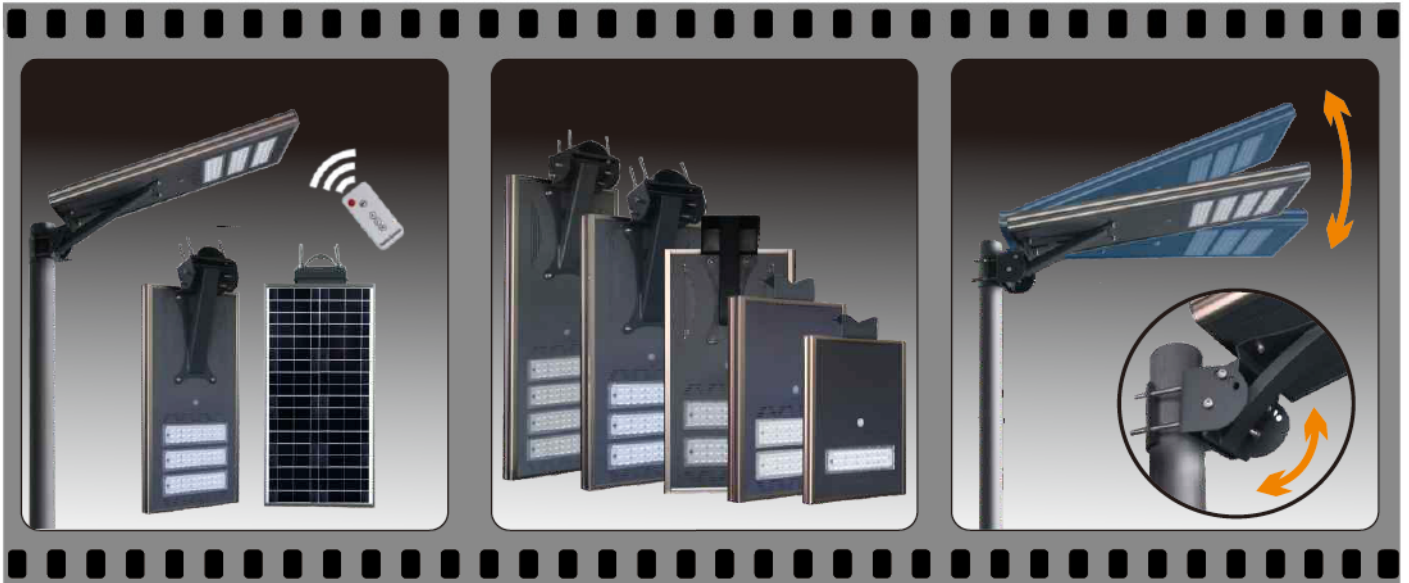

PRODUCT SPECIFICATIONS:

| Model No. | Luminous Flux | Solar Panel | Battery | Beam Angle | Light Mode | Lamp Dimension | IP Grade |
|--------------|---------------|-------------|-------------|------------|--------------------|-------------------|----------|
| HE-SSL20W-B | 2000-2200LM | 25W/18V | 111WH/11.1V | 150°70° | PIR / Time / Mixed | L536*W355*H44MM | IP66 |
| HE-SSL30W-B | 3000-3300LM | 30W/18V | 167WH/11.1V | 150°70° | PIR / Time / Mixed | L605*W355*H70MM | IP66 |
| HE-SSL40W-B | 4000-4400LM | 36W/18V | 222WH/11.1V | 150°70° | PIR / Time / Mixed | L700*W355*H144MM | IP66 |
| HE-SSL50W-B | 5000-5500LM | 40W/18V | 278WH/11.1V | 150°70° | PIR / Time / Mixed | L834*W355*H146MM | IP66 |
| HE-SSL60W-B | 6000-6600LM | 45W/18V | 278WH/11.1V | 150°70° | PIR / Time / Mixed | L834*W355*H156MM | IP66 |
| HE-SSL70W-B | 7000-7700LM | 55W/18V | 296WH/14.8V | 150°70° | PIR / Time / Mixed | L1050*W355*H156MM | IP66 |
| HE-SSL80W-B | 8000-8800LM | 60W/18V | 370WH/14.8V | 150°70° | PIR / Time / Mixed | L1050*W355*H156MM | IP66 |
| HE-SSL100W-B | 10000-11000LM | 80W/18V | 444WH/14.8V | 150°70° | PIR / Time / Mixed | L1245*W355*H156MM | IP66 |